GAS LIFT PACKOFF


GLPO

Gas lift Pack off is a method to create the gas lift passage from the well annulus in to the tubing flow area at a desire location.

The GLPO method would be preferred due to its simple completion and lower project cost then tubing recompletion using RIG or Hydraulic work over.



Drawing Design:

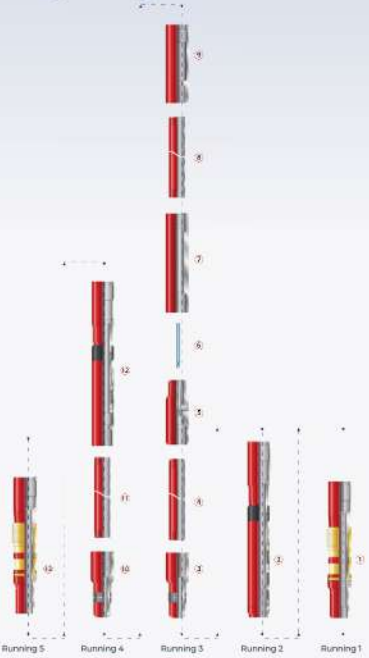

Item No.	Description
1	Lower Tubing Stop Type A
2	Lower Pack Off
3	Stinger
4	Spacer
5	IM Mandrel
6	Conventional mart Orifice
7	Blast Joint
8	Spacer
9	Receptacle
10	Stinger
11	Spacer
12	Upper Pack Off
13	Upper Tubing Stop Type A


Contact Us:

+62 21 2524 915
marketing@globalbuana.com
www.globalbuana.com
Globalindo Buana

GAS LIFT PACKOFF

GLPO

Part of GLPO:



Upper Type A

Part List			
No.	Name	QTY	Part Number
1	Mandrel	1 ea	-
2	Slip	3 ea	-
3	Ring	1 ea	-
4	Slip Carrier	1 ea	-
5	Shear Pin	1 ea	-



Upper Packoff


Part List			
No.	Name	QTY	Part Number
6	Mandrel	1 ea	-
7	O-Ring	3 ea	-
8	Ruber	1 ea	-
9	Top Sub	1 ea	-
10	Rachet	4 ea	-
11	Shear Pin	3 ea	-
12	Lock Nut	1 ea	-
13	Body	1 ea	-
14	Nogo	1 ea	-

Part of GLPO:



Stinger

Part List			
No.	Name	QTY	Part Number
15	Stinger	1 ea	-

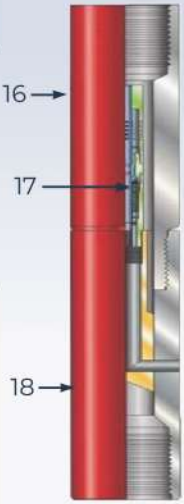

IM Mandrel

Part List			
No.	Name	QTY	Part Number
16	Blast Joint	1 ea	-
17	Conven-tional Orifice Valve	1 ea	-
18	IM Mandrel	1 ea	-



Stinger

Part List			
No.	Name	QTY	Part Number
19	Stinger	1 ea	-

Contact Us:

+62 21 2524 915

marketing@globalbuana.com

www.globalbuana.com

Globalindo Buana

GAS LIFT PACKOFF

GLPO

Part of GLPO:



Lower Packoff

Part List			
No.	Name	QTY	Part Number
20	Mandrel	1 ea	-
21	O-R	3 ea	-
22	Rub	1 ea	-
23	Top Sub	1 ea	-
24	Rachet	4 ea	-
25	Shear Pin	3 ea	-
26	Lock Nut	1 ea	-
27	Body	1 ea	-


Redress Kit


Rubber Element


O-Ring


Ratchet


V-Packing

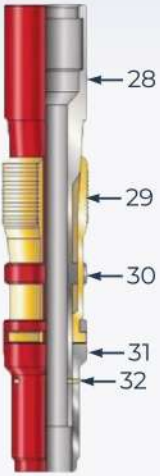

Lower Type A

Part List			
No.	Name	QTY	Part Number
28	Mandrel	1 ea	-
29	Slip	3 ea	-
30	Ring	1 ea	-
31	Slip Carrier	1 ea	-
32	Shear Pin	1 ea	-

Contact Us:

+62 21 2524 915
marketing@globalbuana.com
www.globalbuana.com
Globalindo Buana